


Company _____
 Address _____
 Contact name _____ Date _____ Tel. _____ Fax _____
 Truck make _____ Model _____ Truck basic capacity _____
 Fork capacity required per pair _____ kg Load centre _____ mm

**Forks with ITA/FEM Hooks
to fit non-standard carriage depth.**

Hook	H2	B	C *
I/1			16,5
II/2			16,5
III/3			22
IV/4			26
V/5			35

*C dimension tolerance +1/-0 mm.

B = _____
 C = _____
 E = _____
 H1 = _____
 H2 = _____
 M = _____
 N = _____
 O = _____
 P = _____
 Q = _____

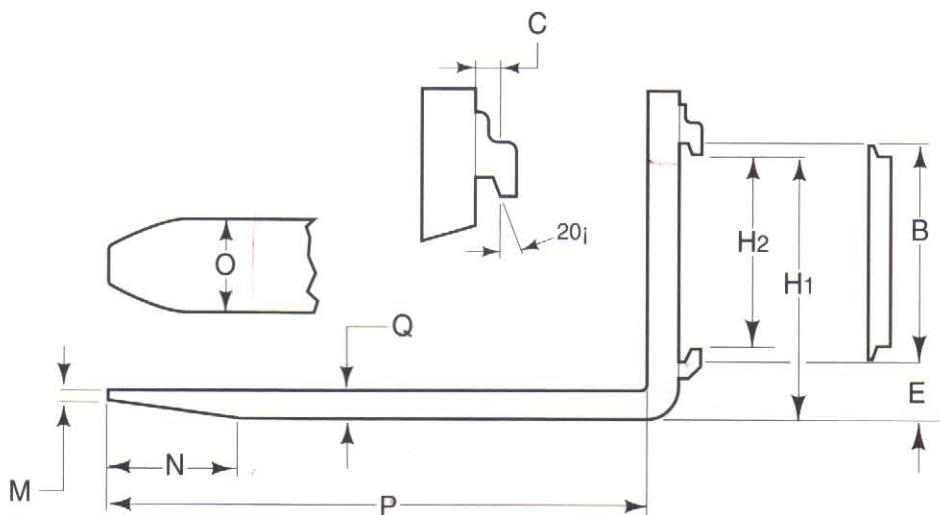

General Notes:

- ① Standard toes and tapers will be supplied, unless specific dimensions are shown at M and N above. N.B. Non-Standard requirements MAY be more expensive.
- ② Standard ITA/FEM hooks carry their own maximum rated capacity. Forks will always be rated with maximum capacity of fork cross section OR hooks fitted (whichever is the lesser). Greater capacity may be achieved by fitting heavy duty hooks at increased cost and delivery.
- ③ To comply with the provisions of machinery directive 98/37 EEC, forks will be supplied with pinkits.